



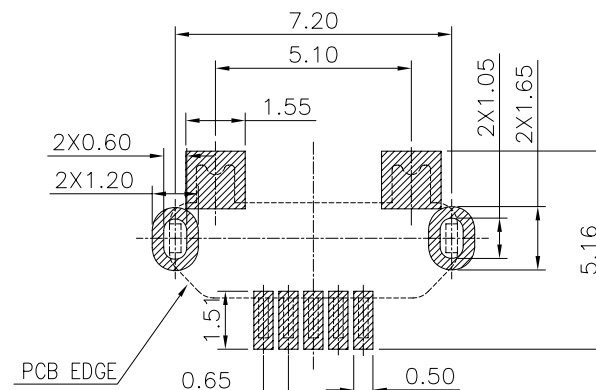
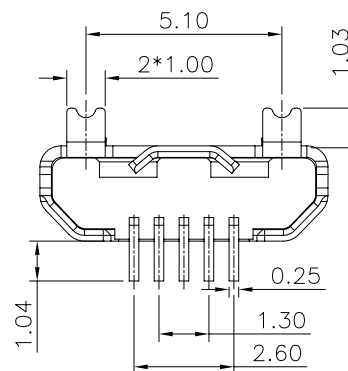



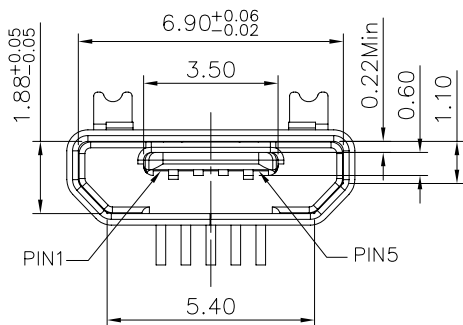

装上CAP尺寸示意图 比例1:2

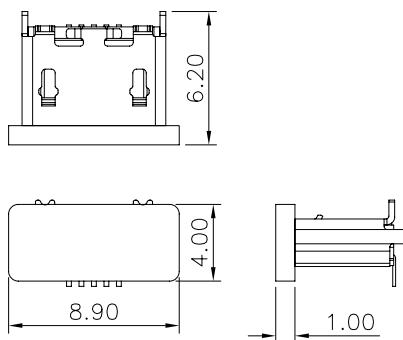

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

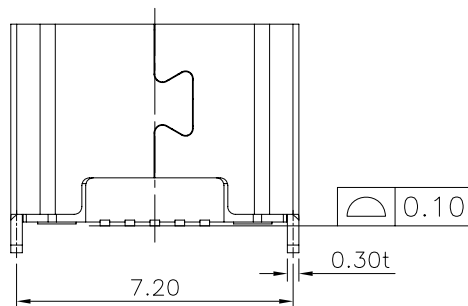

REV	ECN No.	DATE	REMARK
A0	NEW	2017.04.24	NEW RELEASE

SPECIFICATION:

- 1 CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A(1.5CONTACT) MAX.
- 2 VOLTAGE: 30 VAC
- 3 TEMPERATURE RANGE: -30 °C ~ 85 °C
- 4 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 5 DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
- 6 INSULATION RESISTNACE: 100 MEGOHMS MIN
7. DURABILITY: 10,000 CYCLES

TABLE:

Z-MF037TLB11R-A-01	4	CAP	LCP UL94V-0	BLACK	1PCS	24H	Reel
	3	CONTACT	C2680 T=0.15mm	Au 1u" PLATING ON CONTACT AREA; Ni UNDERPLATING OVERALL	1SET		
	2	HOUSING	LCP UL94V-0	BLACK	1PCS		
	1	SHELL	SUS 304 T=0.30mm	Tin PLATING ON CONTACT AREA; Ni UNDERPLATING OVERALL	1PCS		
PRAT NO.		NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	PACKAGING

MATERIAL NO.:

Z-MF037XXXXX-X-01

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X.XXXXX	± ---
	X.XXX	± 0.10
	X.XX	± 0.25
	X.X	± 0.30
	ANGULAR	± ---°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY, AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

ZDT 深圳市中科兴达科技有限公司
SHENZHEN ZDT TECHNOLOGY CO., LTD

TITLE
MICRO USB 5P 直立式SMT无翻边

DOCUMENT NO.
ZDT-MF037

DIMENSION STYLE
MM ONLY

DESIGN UNITS
METRIC

SHEET NO.
1 OF 1

SCALE
5:1

DRAWN BY
SAM

DATE
2017.04.24

CHECKED BY
JAY

DATE
2017.04.24

APPROVED BY
JACKY

DATE
2017.04.24

THIRD ANGLE
PROJECTION

frame size: A4