REV	ECN No.	DATE	REMARK
A0	NEW	2017.04.24	NEW RELEASE

RoHS Compliant Pb

SPECIFICATION:
1 CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A(1.5CONTACT) MAX.
2 VOLTAGE: 30 VAC
3 TEMPERATURE RANGE: -30 °C ~ 85 °C
4 CONTACT RESISTANCE: 30 MILLIONHM MAX.
5 DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
6 INSULATION RESISTNACE: 100 MEGOHMS MIN

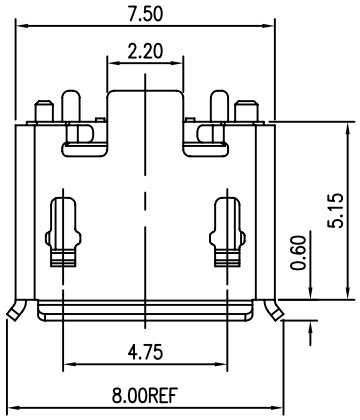

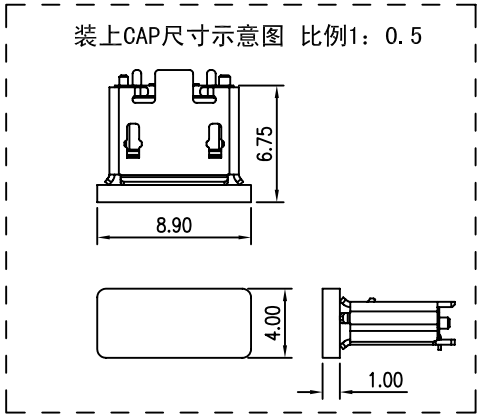

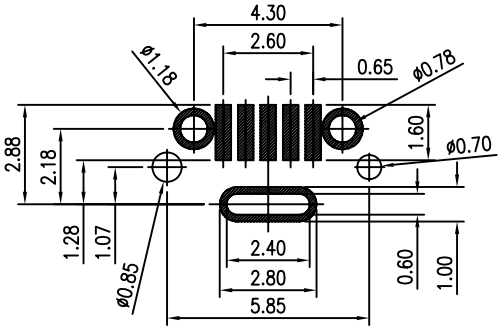

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

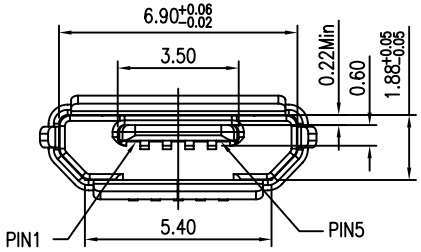

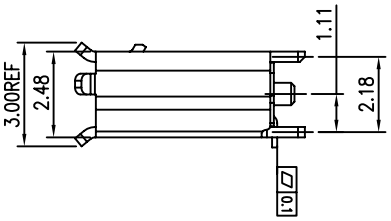

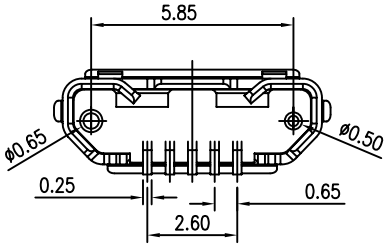

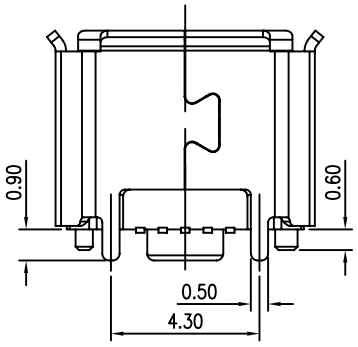

TABLE:

PART NO.	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	PACKAGING
Z-MF016SLB11R-A-01	4	CAP	LCP UL94V-0	BLACK	1PCS	Reel
	3	CONTACT	C2680 T=0.15mm	Au 1u" PLATING ON CONTACT AREA; Ni UNDERPLATING OVERALL	1SET	
	2	HOUSING	LCP UL94V-0	BLACK	1PCS	24H
	1	SHELL	SUS 304 T=0.30mm	Tin PLATING ON CONTACT AREA; Ni UNDERPLATING OVERALL	1PCS	

MATERIAL NO.:
Z-MF016XXXXXX-X-01
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
▽ 0	x.xxxx	± ---
▽▽ 0	x.xxx	± 0.10
▽▽▽	x.xx	± 0.25
	x.x	± 0.30
	ANGULAR	± --°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY, AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

ZDT 深圳市中科兴达科技有限公司 SHENZHEN ZDT TECHNOLOGY CO., LTD

TITLE: MIRCO USB 5F B TYPE 180度 SMT 有柱 有卷边

DOCUMENT NO.: ZDT-MF016
SHEET NO.: 1 OF 1

DRAWN BY	DATE
SAM	2017.04.24
CHECKED BY	DATE
JAY	2017.04.24
APPROVED BY	DATE
JACKY	2017.04.24

DIMENSION STYLE: MM ONLY
DESIGN UNITS: METRIC
SCALE: 5:1
THIRD ANGLE PROJECTION

frame size: A4