REV	ECN No.	DATE	REMARK
A0	NEW	2016.03.04	NEW RELEASE

RoHS Compliant Pb

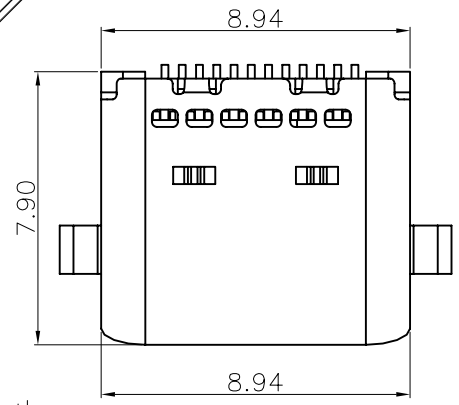

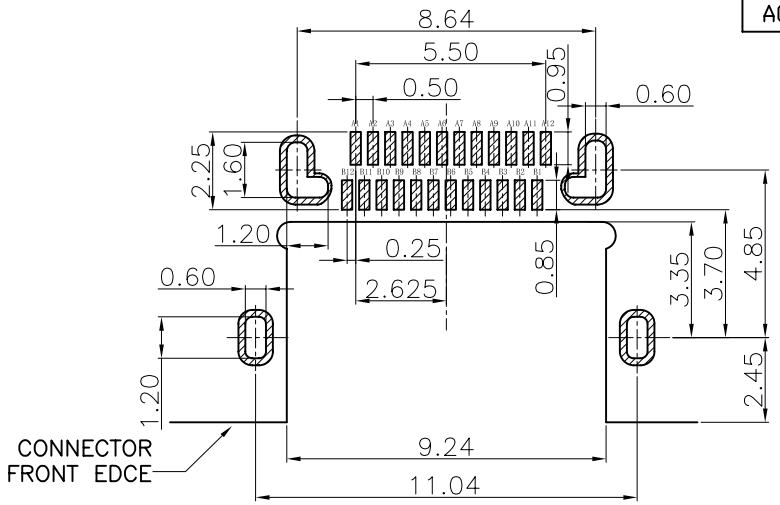

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:
SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
2. Withstanding Voltage: 100V AC
3. TEMPERATURE RANGE: −30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N (1~1000次)
   6N~20N (10000次之后)
8. DURABILITY: 10,000 CYCLES

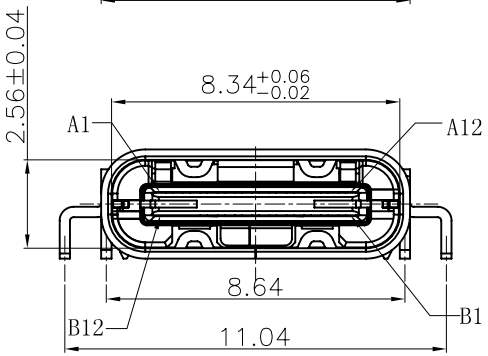

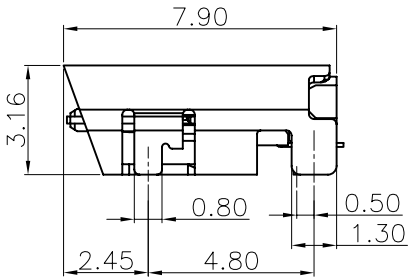

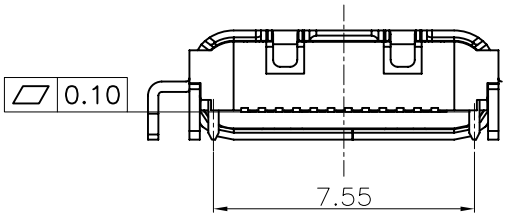

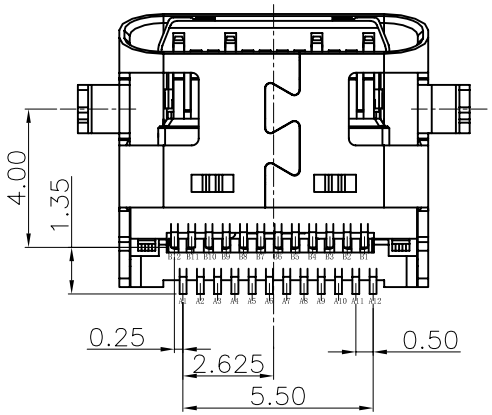

TABLE:

NO.	PART NO.	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	盐雾	PACKAGING
1	Z-CF034SLB11R-A-01	5	SHELL	SUS304 T=0.30mm	Ni 50u" Min Plated	1PCS	24H	Reel
		4	SPRING	SUS304 T=0.10mm	---	1PCS		
		3	LATCH	SUS301 T=0.20mm	Tin 80u" Min Plated	1PCS		
		2	CONTACT	C1814 T=0.12mm	G/F PLATING ON CANTACT AREA: TIN 80u" Min TING ON SOLDER TAIL,NI 50u" Min UNDERPLATING OVERALL	1SET		
		1	HOUSING	LCP UL94V-0	BLACK	1PCS		

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

MATERIAL NO.:
Z-CF034XXXXXX-X-01
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL ▽ ▽ ▽

GENERAL TOLERANCES (UNLESS SPECIFIED)

x.xxxx	± ---
x.xxx	± 0.10
x.xx	± 0.25
x.x	± 0.30
ANGULAR	± --°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY, AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

ZDT 深圳市中科兴达科技有限公司 SHENZHEN ZDT TECHNOLOGY CO., LTD

TITLE: USB C F 沉板0.8铁壳斜口成品

DOCUMENT NO.: ZDT-CF034

SHEET NO.: 1 OF 1

DRAWN BY	SAM	DATE	2016.03.04
CHECKED BY	JAY	DATE	2016.03.04
APPROVED BY	JACKY	DATE	2016.03.04

DIMENSION STYLE: MM ONLY | DESIGN UNITS: METRIC | SCALE: 5:1

THIRD ANGLE PROJECTION

frame size: A4