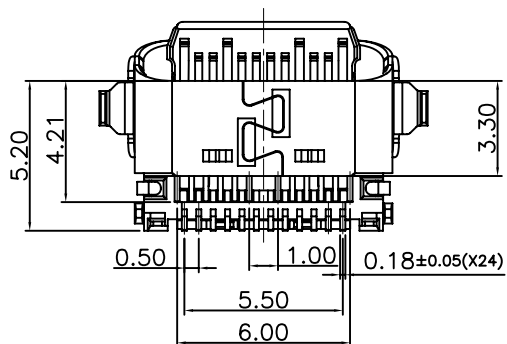
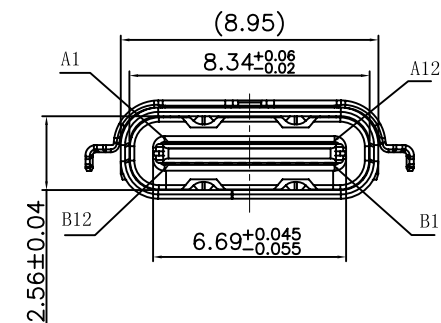
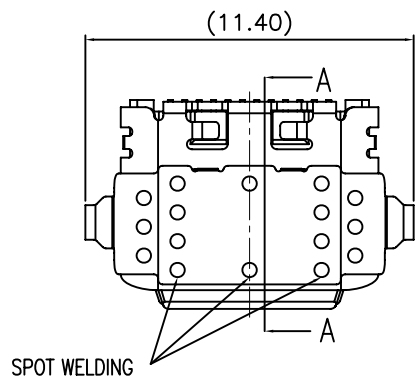


2. PRODUCT SPECIFICATIONS:

- 2.1. CURRENT RATING: 1.5A/PIN MAX(A4,A9,B4,B9)
1.25A/PIN MAX(A1,A12,B1,B12),0.25A(OHER PIN)
- 2.2. TEMPERATURE RANGE: -40 °C ~ 85 °C
- 2.3. CONTACT RESISTANCE: 30 MILLIONHM MAX
- 2.4. INSULATION RESISTANCE: 100 MEGOHMS MIN.
- 2.5. DIELECTRIC WITHSTANDING VOLTAGE:100 VAC
- 2.6. LNSERTION FORCE : 5N~20N
- 2.7. UNMATING
FORCE:Initial:8N~20N;durability:6N~20N
- 2.8. DURABILITY: 10,000 CYCLES

MATERIAL NO.:

SEE THE TABLE
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X.XXXX	± ---
	X.XXX	± 0.10
	X.XX	± 0.25
	X.X	± 0.30
ANGULAR	± ---°	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

ZDT 深圳市中兴兴达科技有限公司
SHENZHEN ZDT TECHNOLOGY CO., LTD

TITLE
USB TYPE C 24PIN 沉板1.60 双壳CONN.

DOCUMENT NO.
Z-CF087-01

DIMENSION STYLE
MM ONLY

DESIGN UNITS
METRIC

SHEET NO.
1 OF 3

SCALE
5:1

DRAWN BY
SAM

DATE
2015.05.10

CHECKED BY
JAY

DATE
2015.05.10

APPROVED BY
JACKY


DATE
2015.05.10



THIRD ANGLE
PROJECTION

frame size: A4

REV	ECN No.	DATE	REMARK
A0	NEW	2015.05.10	NEW RELEASE

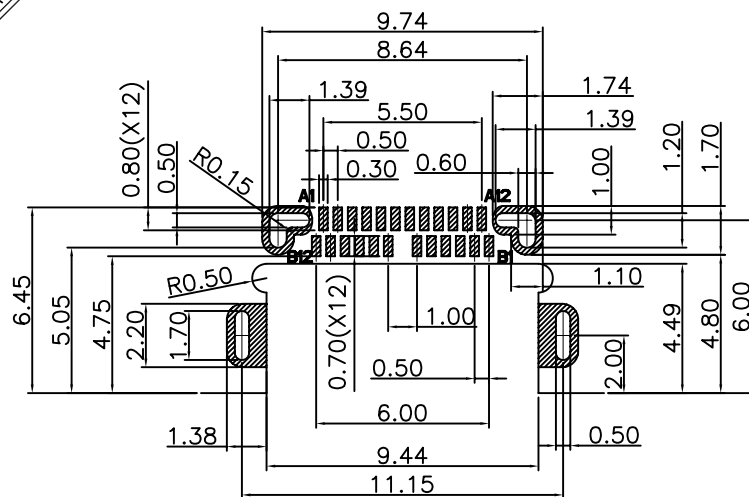

RECOMMENDED P.C.B. LAYOUT (THICKNESS:0.80MM)
TOLERANCE UNSPECIFIED ±0.05mm

PIN ASSIGNMENT

pin	Signal name	pin	Signal name	pin	Signal name	pin	Signal name
A1	GND	B12	GND	A7	Dn1	B6	Dp2
A2	SSTXp1	B11	SSRXp1	A8	SBU1	B5	CC2
A3	SSTXn1	B10	SSRXn1	A9	VBUS	B4	VBUS
A4	VBUS	B9	VBUS	A10	SSRXn2	B3	SSTXn2
A5	CC1	B8	SBU2	A11	SSRXp2	B2	SSTXP2
A6	Dp1	B7	Dn2	A12	GND	B1	GND

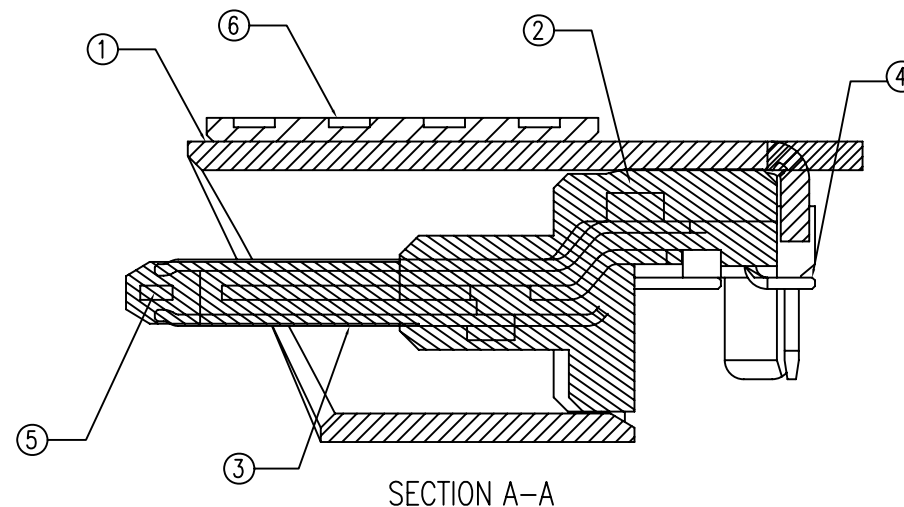


TABLE:

Z-CF087SLB12-A-01	6	SHELL-2	1PCS	STAINLESS STEEL	50u" MIN. NI UNDERPLATING OVERALL
	5	MID PLATE	1PCS	STAINLESS STEEL	50u" MIN. NI UNDERPLATING OVERALL
	4	CONTACT B	1SET	COPPER ALLOY	Au PLATING ON CONTACT AREA,THICKNESS SEE P/N
	3	CONTACT A	1SET	COPPER ALLOY	Au 1~3u" PLATING ON SOLDER AREA
	2	HOUSING	1PCS	NYLON	50u" MIN. NICKEL UNDER PLATING ALL OVER
	1	SHELL-1	1PCS	STAINLESS STEEL	COLOR:BLACK
PART NO.	NO.	DESCRIPTION	QTY.	MATERIAL	FINISH

MATERIAL NO.:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY, AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
SEE THE TABLE		 深圳市中兴兴达科技有限公司 SHENZHEN ZDT TECHNOLOGY CO.,LTD				DRAWN BY		DATE		
REVIEW TABLE FOR DETAILS						SAM		2015.05.10		
QUALITY SYMBOL 0 ▽= 0 0 0 0 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		TITLE USB TYPE C 24PIN 沉板1.60 双壳CONN.				CHECKED BY		DATE	
	x.xxxx						JAY		2015.05.10	
	x.xxx		DOCUMENT NO. Z-CF087-01		SHEET NO. 2 OF 3		APPROVED BY JACKY		DATE 2015.05.10	
	x.xx									
	x.x		DIMENSION STYLE MM ONLY		DESIGN UNITS METRIC		SCALE 5:1		 THIRD ANGLE PROJECTION	
	ANGULAR									

frame size: A4








Reel off direction

(40 Empty)

Pull out direction

(24 Empty)

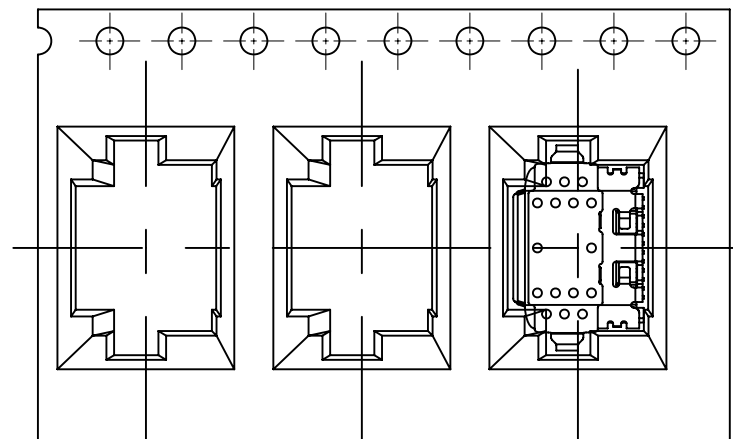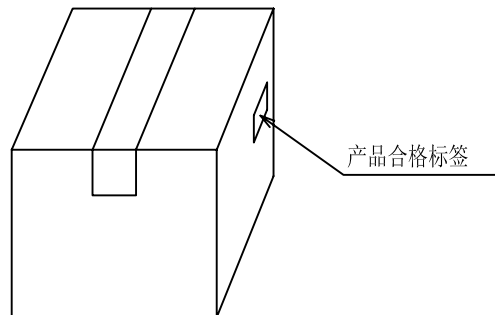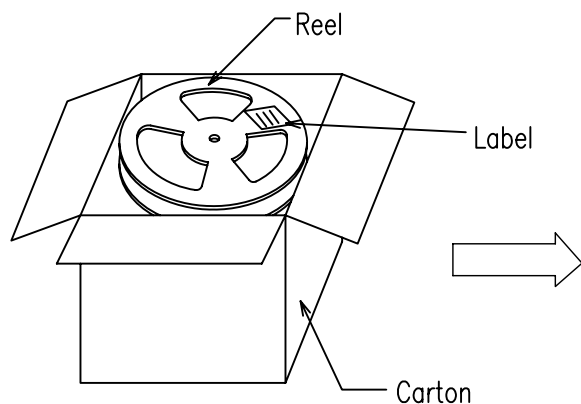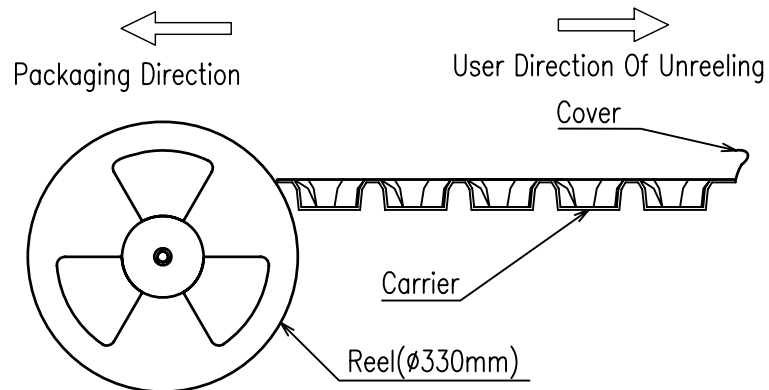

NOTES:

1. 载带材质:PS
2. 包装内容:SEE TABLE A

TABLE A :

PCS/REEL	REEL/CARTON	QTY/CARTON	CARTON SIZE/MM
1400	10 REEL	14000 PCS	340*340*300

MATERIAL NO.:

SEE THE TABLE
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL		GENERAL TOLERANCES (UNLESS SPECIFIED)	
0	0	x.xxxx	± ---
0	0	x.xxx	± 0.10
0	0	x.xx	± 0.25
0	0	x.x	± 0.30
0	0	ANGULAR	± ---°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO
ZDT TECHNOLOGY. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

ZDT 深圳市中科兴达科技有限公司
SHENZHEN ZDT TECHNOLOGY CO., LTD

TITLE
USB TYPE C 24PIN 沉板1.60 双壳CONN.

DOCUMENT NO.
Z-CF087-01

DIMENSION STYLE
MM ONLY

DESIGN UNITS
METRIC

SHEET NO.
2 OF 3

SCALE
5:1

DRAWN BY
SAM DATE
2015.05.10

CHECKED BY
JAY DATE
2015.05.10

APPROVED BY
JACKY DATE
2015.05.10

THIRD ANGLE
PROJECTION

frame size: A4