

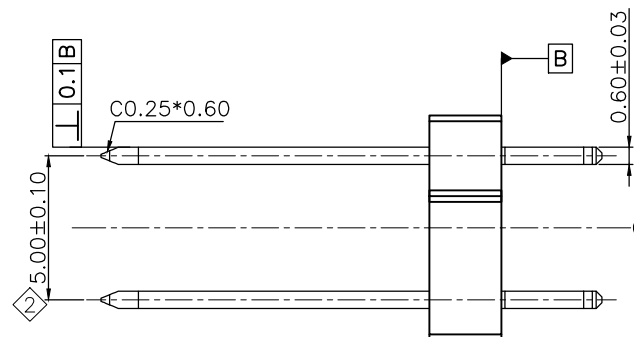
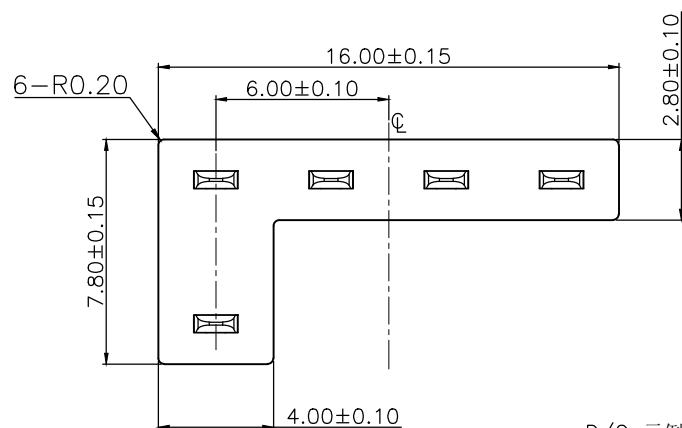
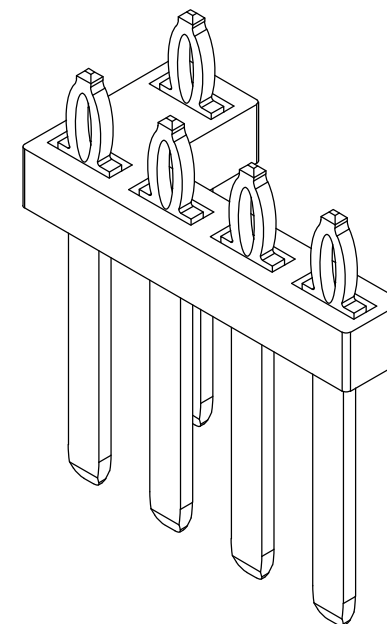


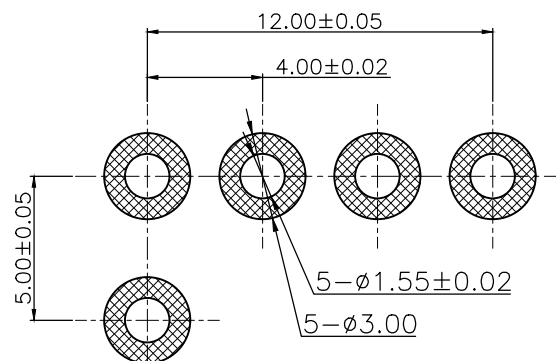

REV	ECN No.	DATE	REMARK
A	NEW	2021-06-30	NEW RELEASE

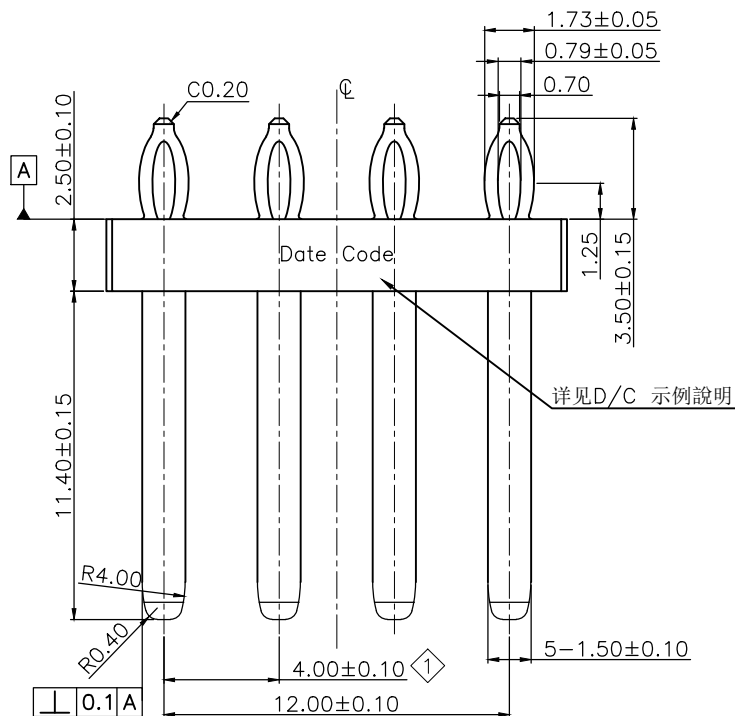

NOTE:

1. Material:
1-1. Housing: PBT 30% Fiber Glass, BLACK, UL94 V-0
1-2. Terminal: C2680H
2. Plating:
2-1. Terminal: Bright Tin 120u" Over 50u"Min Nickel.
3. Ratings Current: DC 2A
4. Dielectric Withstanding Voltage: 500V DC for 1 minute
5. Salt Spray: 12 Hours
6. 端子保持力: 1Kg or more per pin
7. 產品插板力: 40N~50N
8. 帶◇標記的尺寸為CPK管控尺寸

D/C 示例說明:

- 2 4 16 3
3表示周三
16表示16周
4表示12年
2表示瑞均

PART NO.:

PMHA001-104PB23T

ZDT 深圳市中科兴达科技有限公司
SHENZHEN ZDT TECHNOLOGY CO., LTDDRAWN BY
SAMDATE
2021-06-30QUALITY SYMBOL
= 0 V= 0GENERAL TOLERANCES
(UNLESS SPECIFIED)

x.xxxx	±	---
x.xxx	±	0.05
x.xx	±	0.10
x.x	±	0.15
ANGULAR	±	---

TITLE

4.0mm Pitch Press-fit Type Pin
Header

DWG.NO.

PMHA001-1

SHEET NO.

1 OF 2

DIMENSION STYLE
MM ONLYDESIGN UNITS
METRICSCALE
1:1APPROVED BY
JACKYDATE
2021-06-30THIRD ANGLE
PROJECTION

frame size: A4